


vATIS

Introduction

vATIS is a software used to generate ATIS information for specific airports (max 4). Controllers can choose which aerodrome configuration they are using (active runways etc.) and along with real-world weather, they can generate an ATIS.

Icon	Software	Description	Download Link	Installation
	EuroScope	Main Radar Software	Download	Standard .exe installation

Profiles


Profile	Description	Download Link	Installation
vATIS Profile	Airports Settings for vATIS - LGGG	Download	Open vATIS, click "Insert" and choose the downloaded file
vATIS Profile	Airports Settings for vATIS - LCCC	Download	Open vATIS, click "Insert" and choose the downloaded file

You can find the official vATIS Documentation here: <https://vatis.app/docs/>

Setup


After you have downloaded AFV it is now time to set it up.

1. First you will need to download the vATIS Profiles for LGGG (and LCCC) found in the [Software](#) section.
2. Then open up vATIS and you should see this:

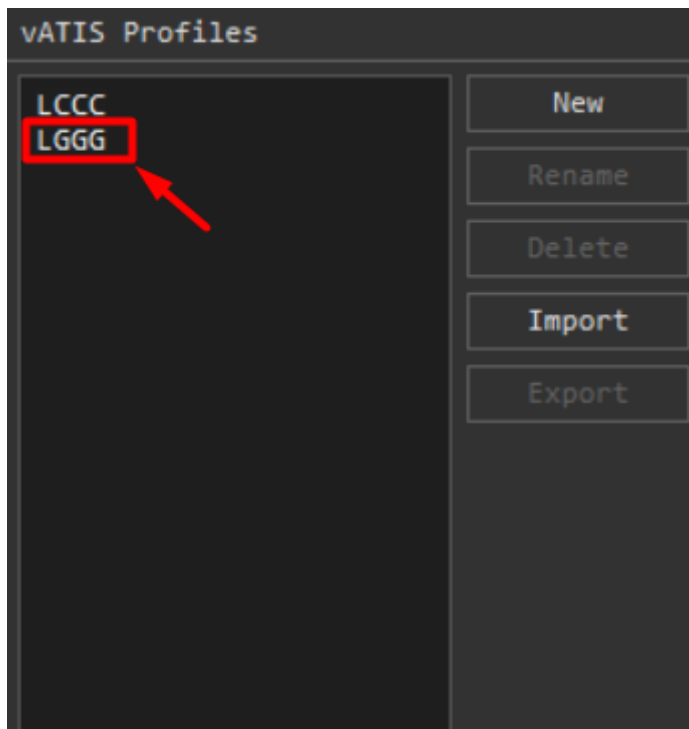

3. Press


le. Then you should see

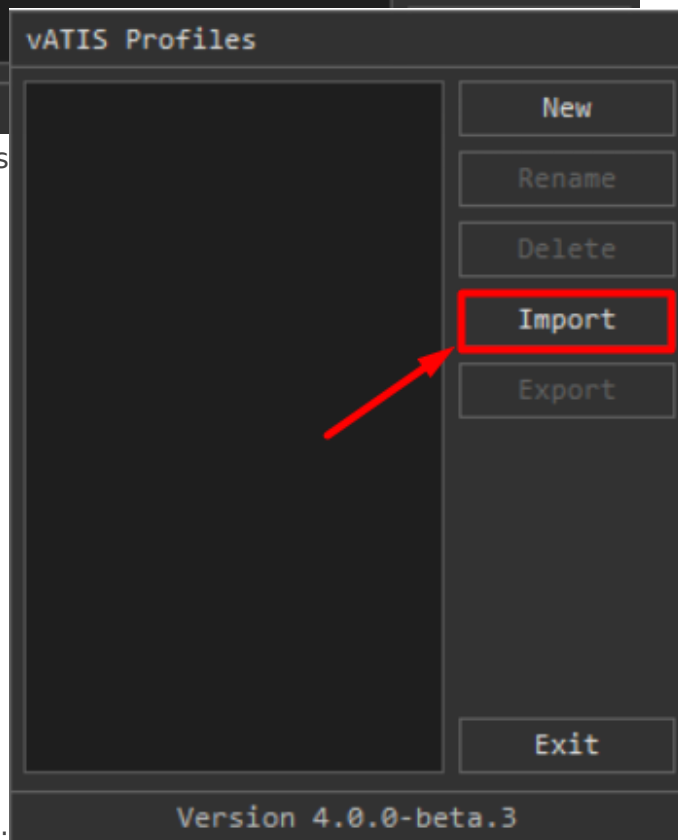

this:

4. Double click on one of the profiles that you have imported, eg LGGG.

5. A window will appear. Configure vATIS like

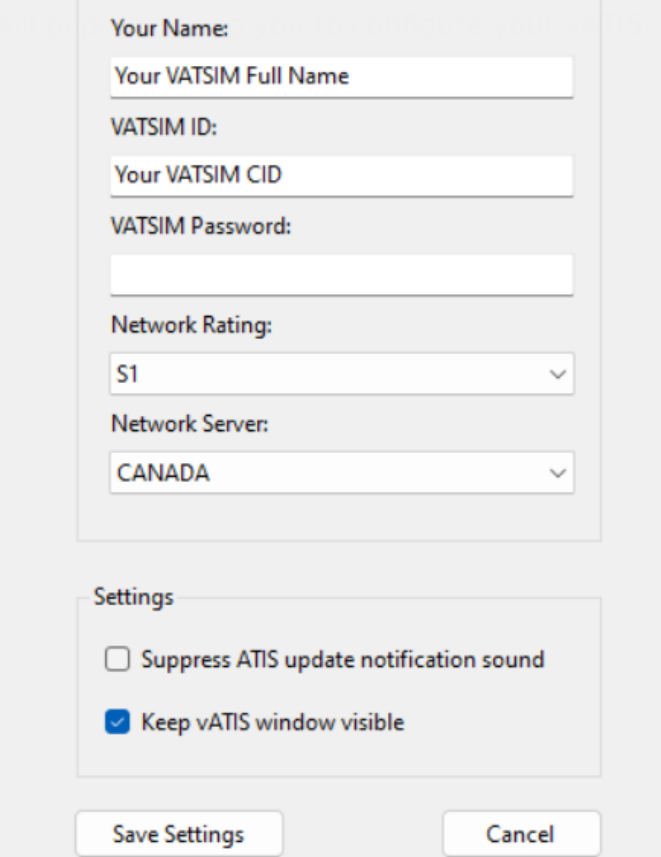


The screenshot shows a configuration window for vATIS. It contains the following fields and options:

- Your Name:** A text input field with the placeholder "Your VATSIM Full Name".
- VATSIM ID:** A text input field with the placeholder "Your VATSIM CID".
- VATSIM Password:** A text input field.
- Network Rating:** A dropdown menu currently showing "S1".
- Network Server:** A dropdown menu currently showing "CANADA".
- Settings:** A section containing two checkboxes:
 - ☐ Suppress ATIS update notification sound
 - ☒ Keep vATIS window visible
- At the bottom are two buttons: "Save Settings" and "Cancel".

this below:


6. Press "Save Settings", then "Cancel" and you will be brought to the main vATIS Display. The first airport in the list is LGAV (HvACC's training airport)

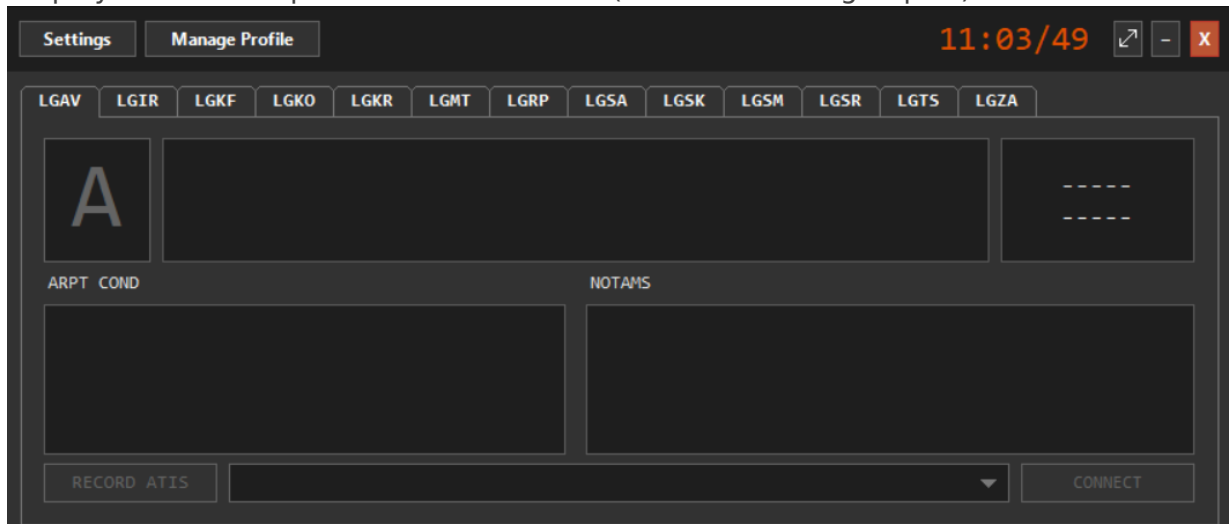

The screenshot shows the main vATIS Display interface. It features a dark theme with the following elements:

- Top bar: "Settings" and "Manage Profile" buttons on the left, and a digital clock "11:03/49" with window control icons on the right.
- Airport Selection Bar: A row of buttons for different airports: LGAV, LGIR, LGKF, LGKO, LGKR, LGMT, LGRP, LGSA, LGSK, LGSM, LGSR, LGTS, and LGZA. "LGAV" is currently selected.
- Main Display Area:
 - On the left, a large "A" in a box representing the ATIS character.
 - In the center, a large black rectangular area for the ATIS message.
 - On the right, a small box with four dashes "----" representing the current frequency.
- Bottom Section:
 - Two large black rectangular areas labeled "ARPT COND" and "NOTAMS".
 - A "RECORD ATIS" button on the left.
 - A dropdown menu in the center.
 - A "CONNECT" button on the right.

7. You can select the appropriate runway configuration by clicking the menu bar and selecting the correct rwy config, eg DEP 03R ARR 03L:

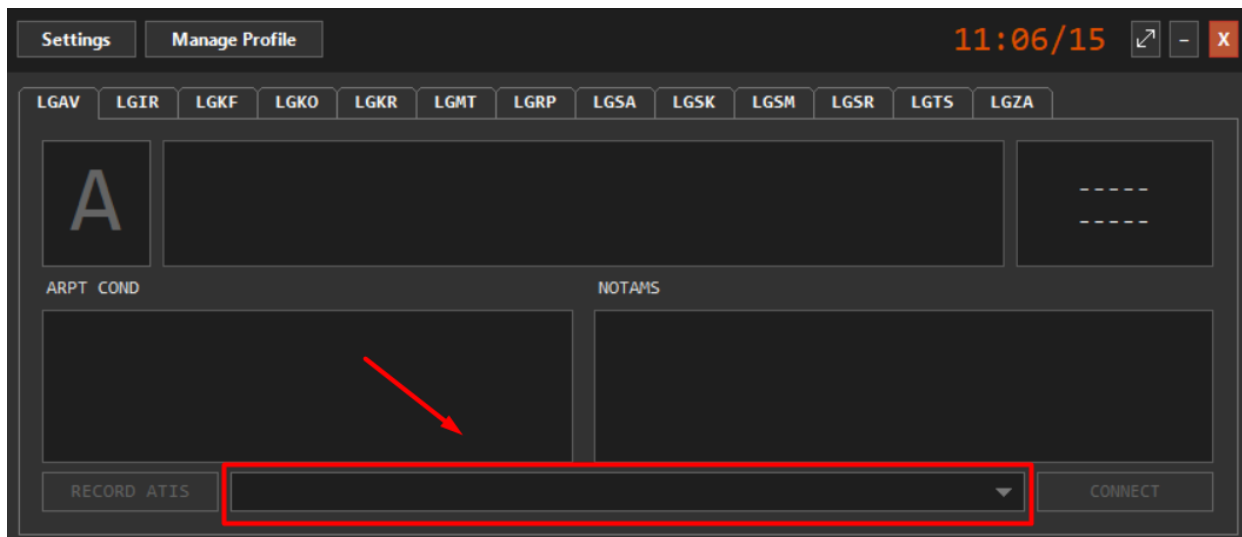

You are good to go!

Revision #41

Created 1 September 2024 15:39:48 by 1500691

Updated 14 March 2025 11:01:43 by 1463640